




Bandmaster 609 K FM Stereo


Form. 139 2.63 Tg. 562 L 695

SKALALAMPER 6,3V 0,3A





222V
0,04 V RIPPLE



ALLE SPENDINGER ER MÅLT MED RØRVOLTMETER (INDR. MODST. 12 M Ω)
 OSCILLATORSPENDING MÅLT MIDT I OMRÅDET
 FM: MÅLT VED 5V OVER 6,4 μF EL.
 KOND. U MOD. (A) 94 MHz = 2 μV
 MF = 107 MHz (B) = 0.1 mV (C) = 5 mV (D) = 0.2 V (1V OVER 6,4 μF)
 LF = 400 Hz (E) = 10 mV (50 mW UD)

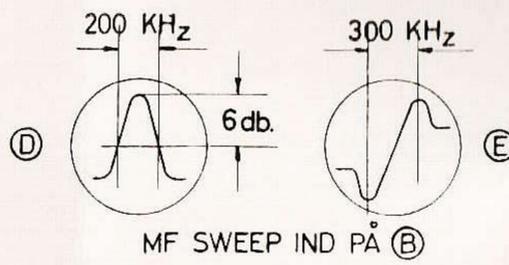

KONDENSATOR MRK st₁ STYROFLEX 125V
 " " " " st₅ " " 500V
 " " " " pe₁ POLYESTER 125V
 " " " " pe₄ " " 400V
 MODSTANDE UDEN ANGMELSE : SBT
 MÆRKET HS: BEYSSCHLAG & ROSENTHAL 05W

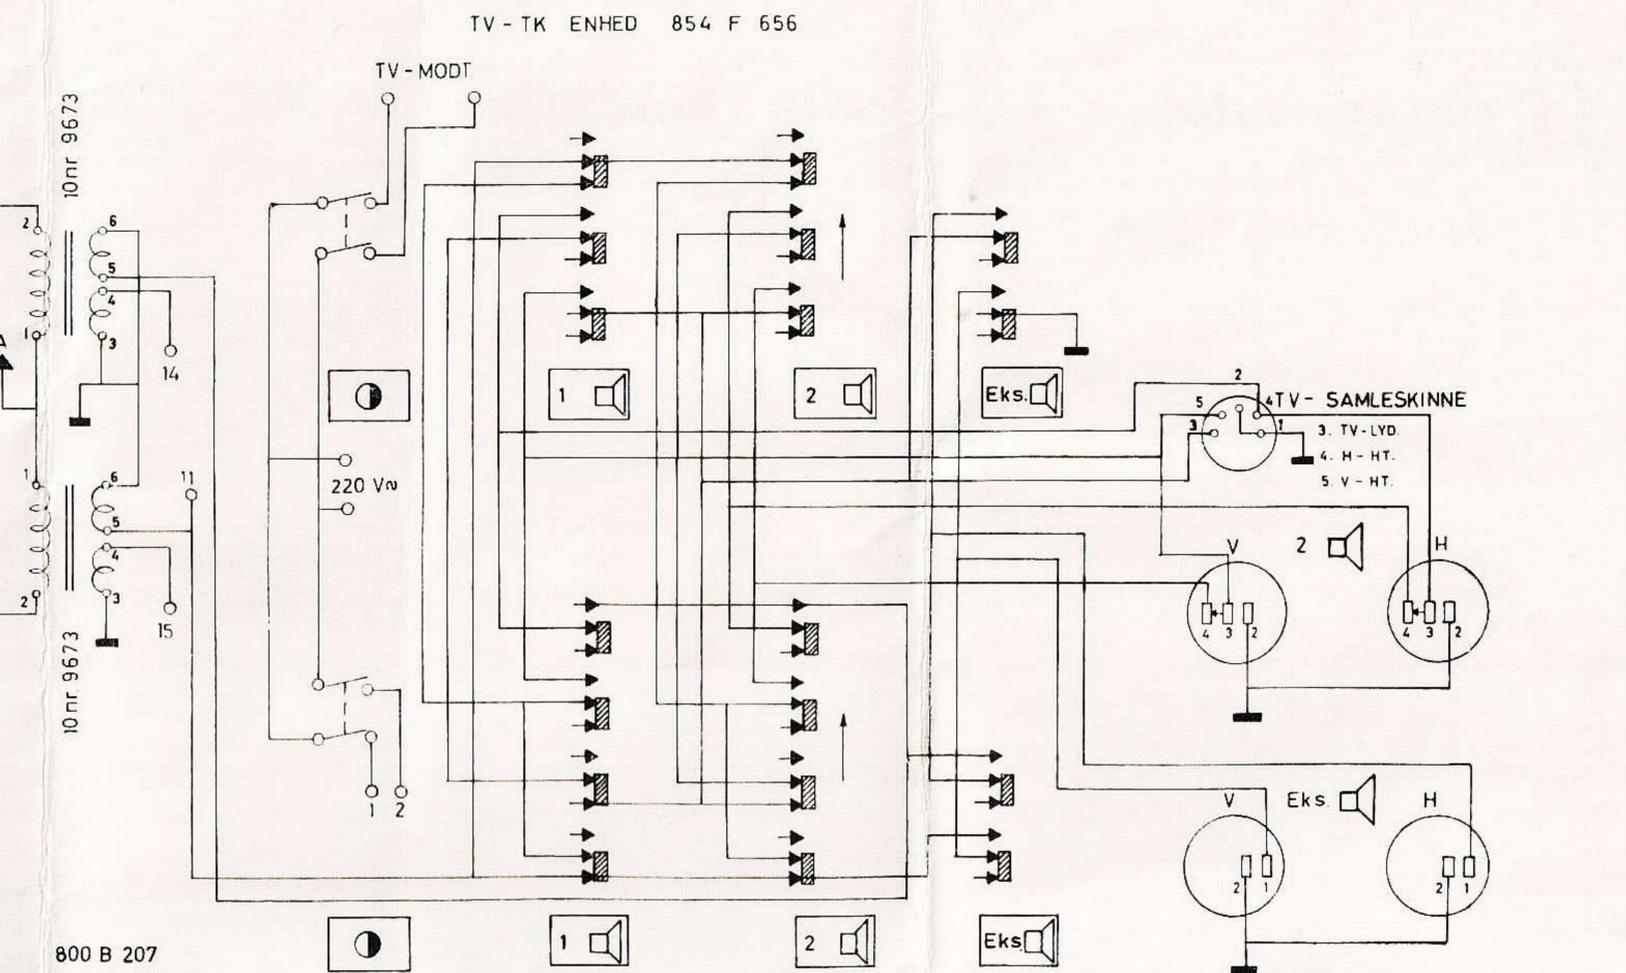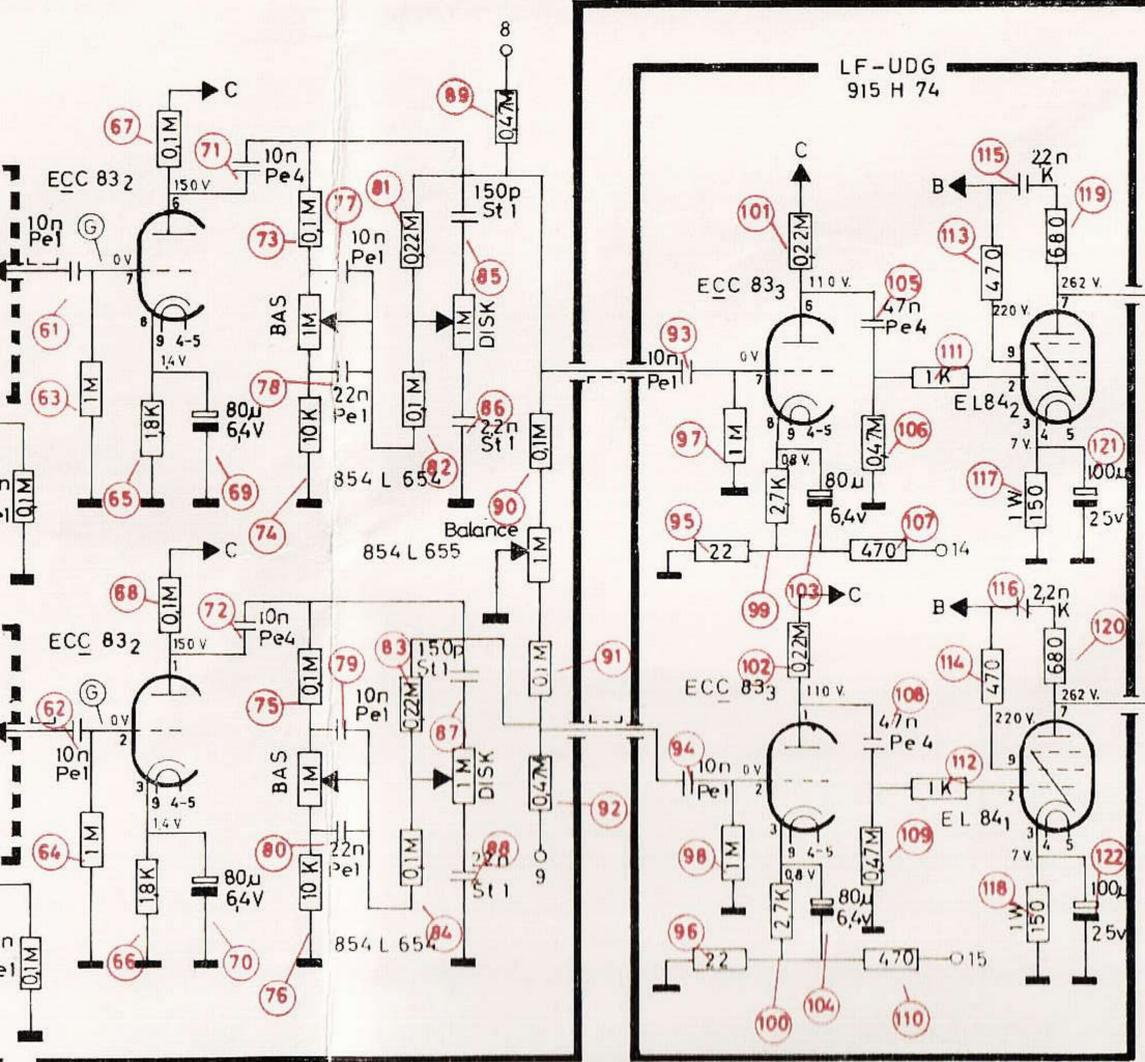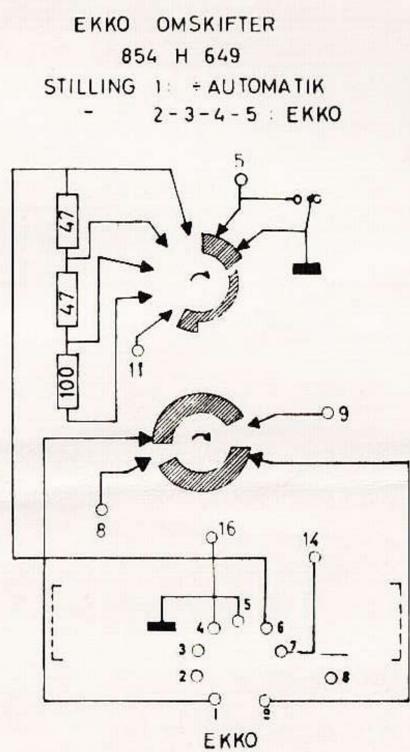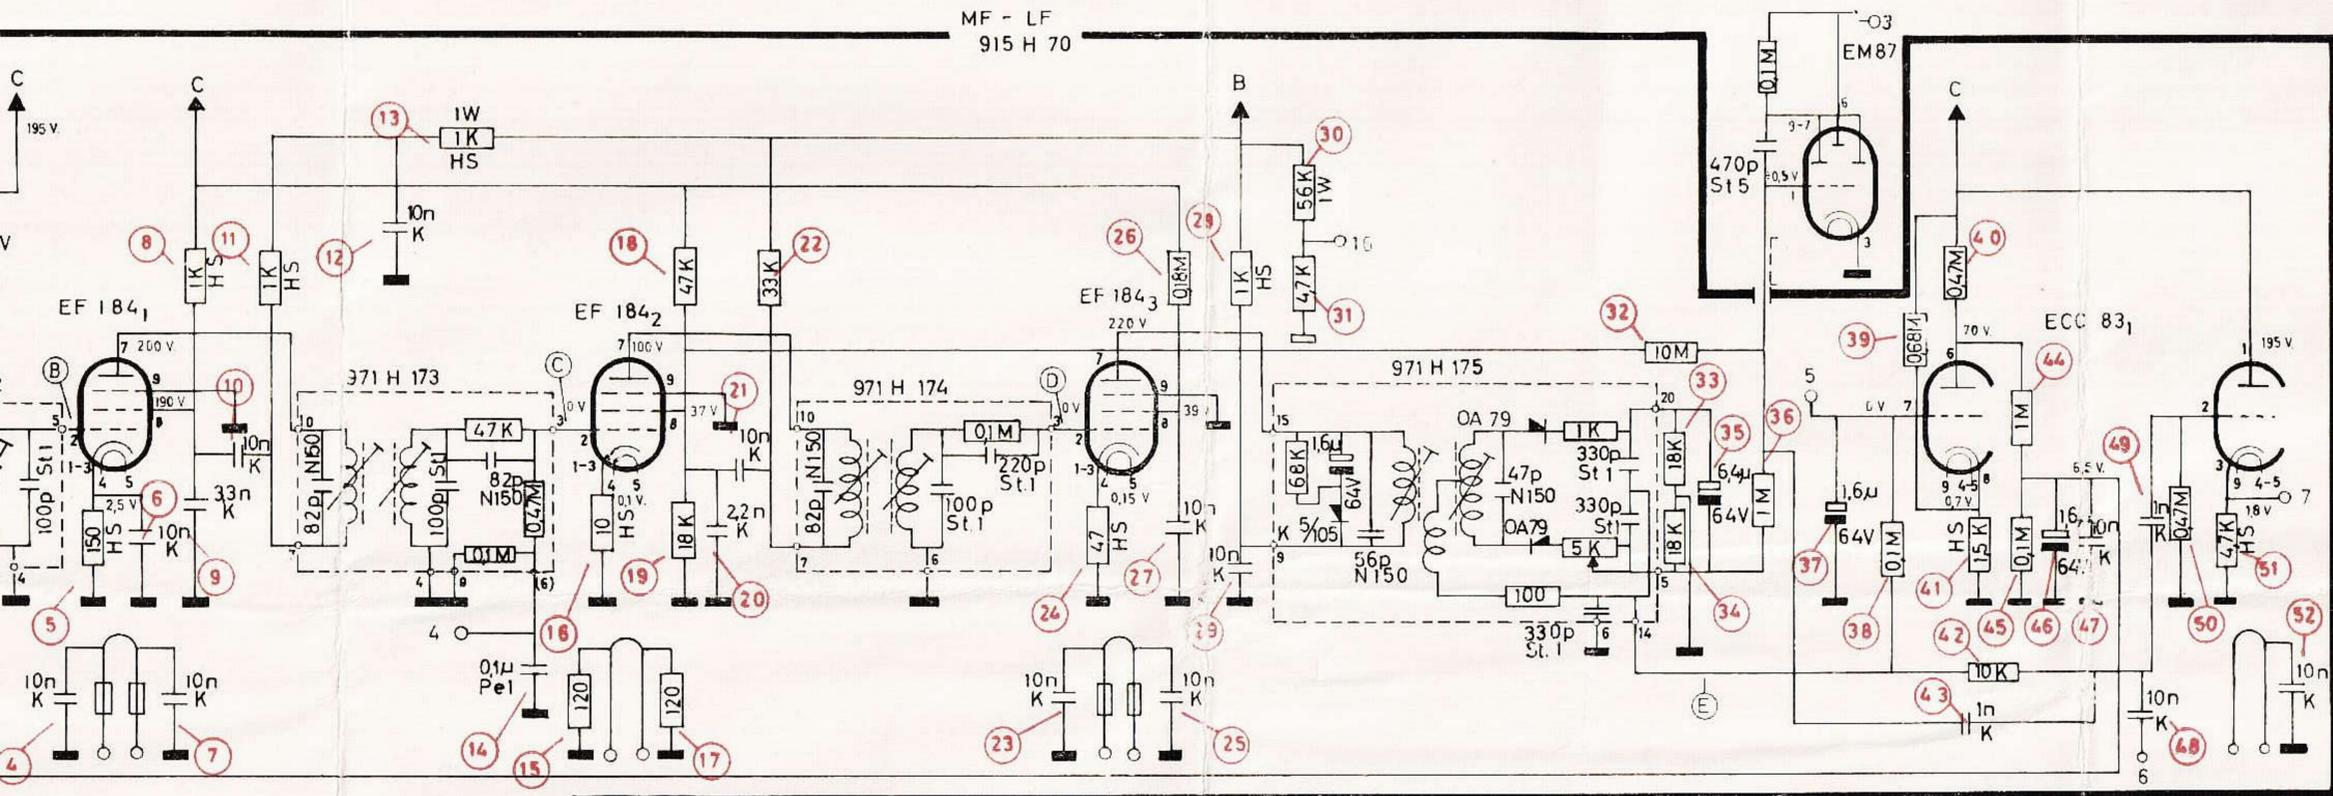

800 B 207
680 B 266

FM TK ENHED 854 F 656

