


11091881

11091882

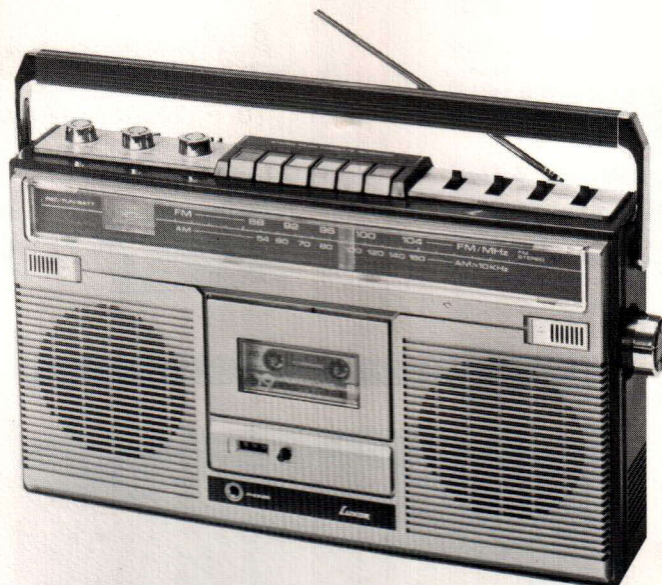

Nov. 1978

TEKNISKA DATA

SPECIFICATIONS

BANDSPELARE

Driftspänning
Power supply

Frekvensområde (band)
Frequency response (tape)

Störavstånd
Signal/noise ratio

Uteffekt
Power output

Radering
Erase efficiency

Överhörning
Crosstalk

Svajning
Wow and flutter

Hastighetsavvikelse
Speed deviation

Snabbspolning
Fast wind

TAPE RECORDER

220V 50 Hz/9V DC

Normal (FeO₂) 63 - 8.000
CrO₂ 63 - 10.000

46 dB

2x2.5W (10% distortion, AC)

55 dB


30 dB

0.4 %



± 1.5 %

120 s (C60)

KOPPLINGSSCHEMA CIRCUIT DIAGRAM

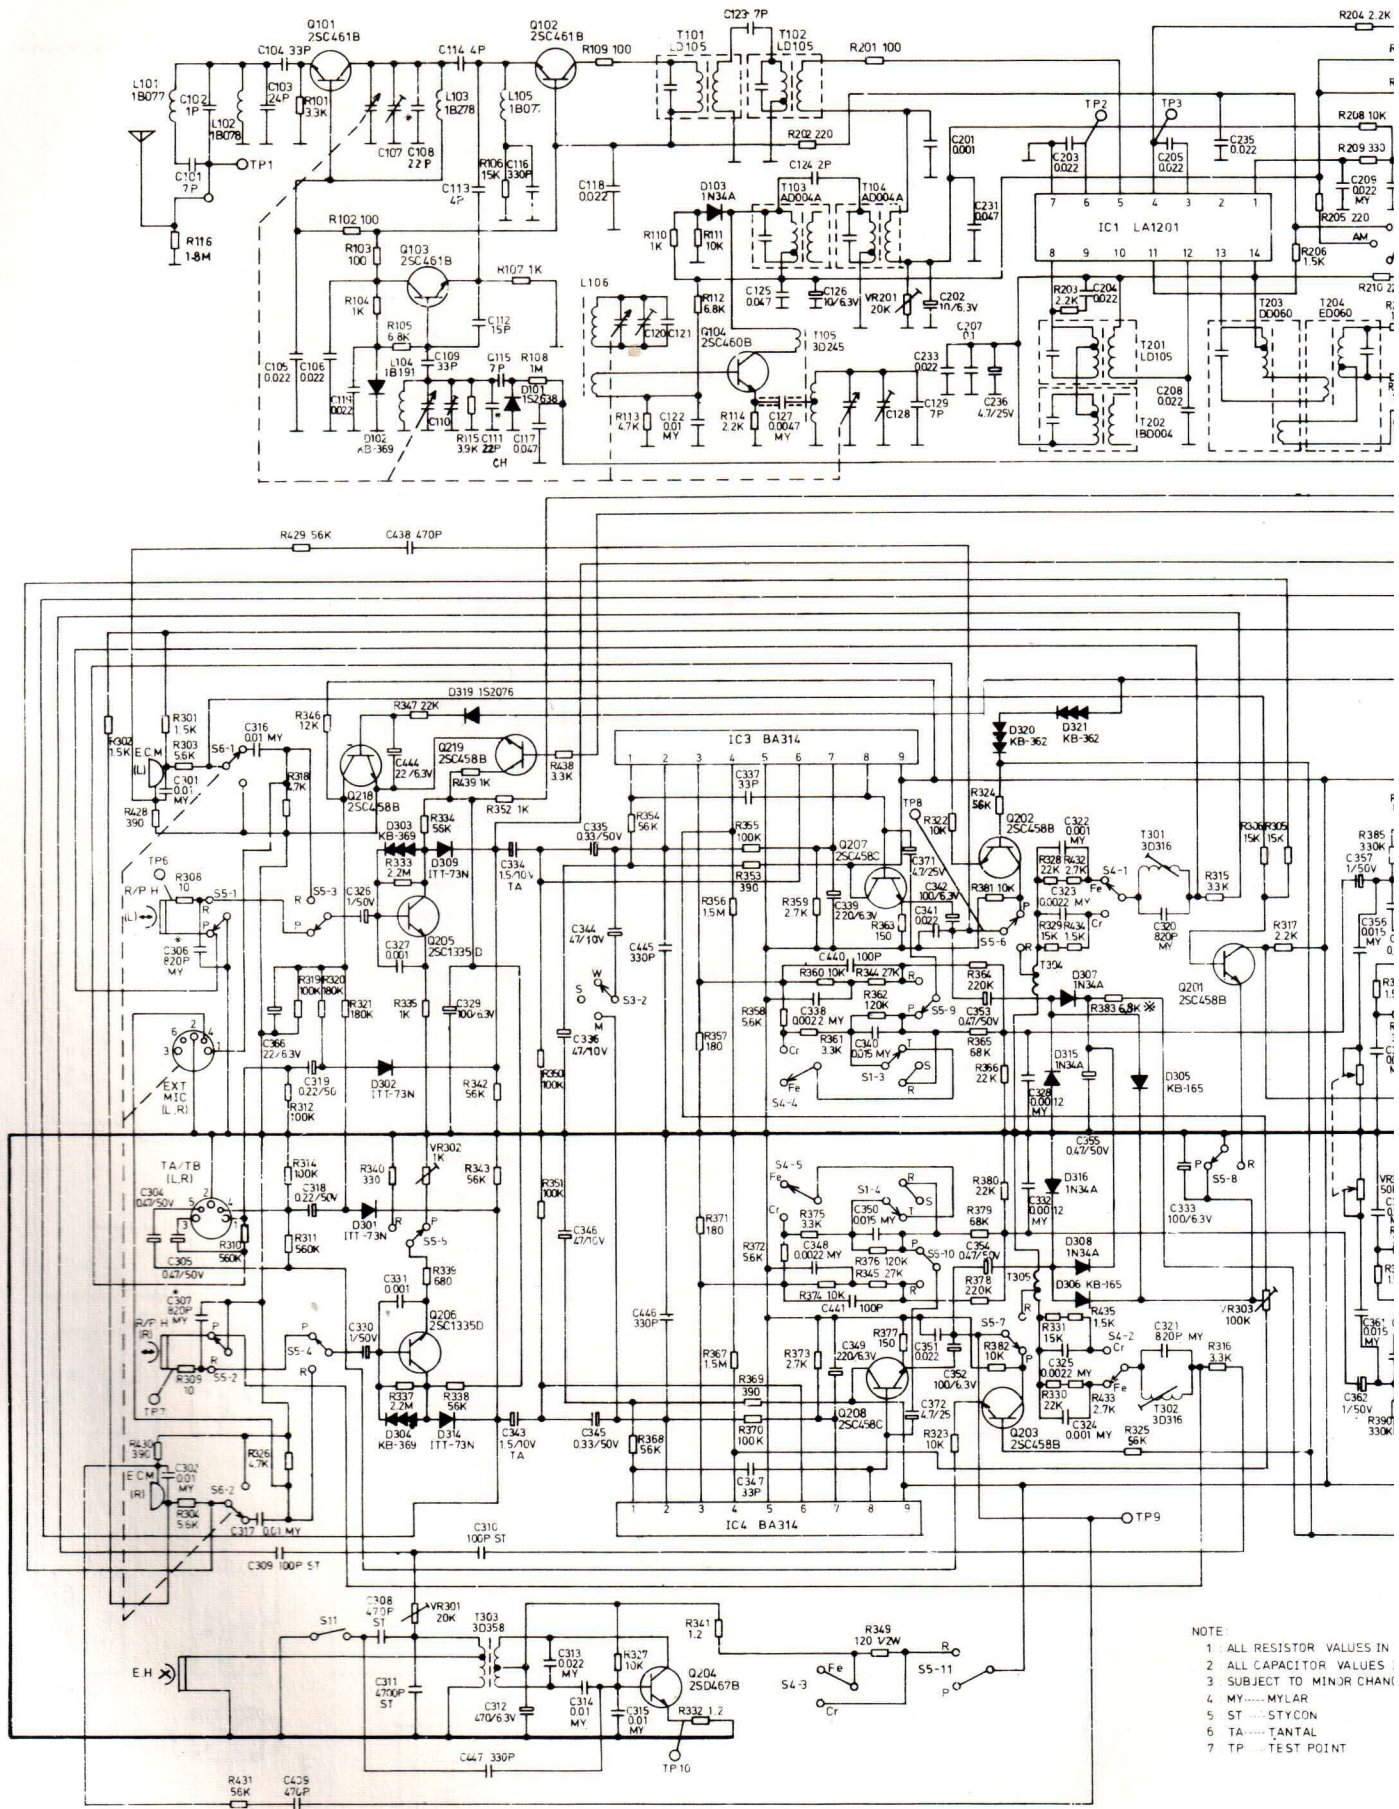

NOTE:
 1 ALL RESISTOR VALUES IN
 2 ALL CAPACITOR VALUES IN
 3 SUBJECT TO MINOR CHANG
 4 MY-----MYLAR
 5 ST-----STYCON
 6 TA-----TANTAL
 7 TP-----TEST POINT

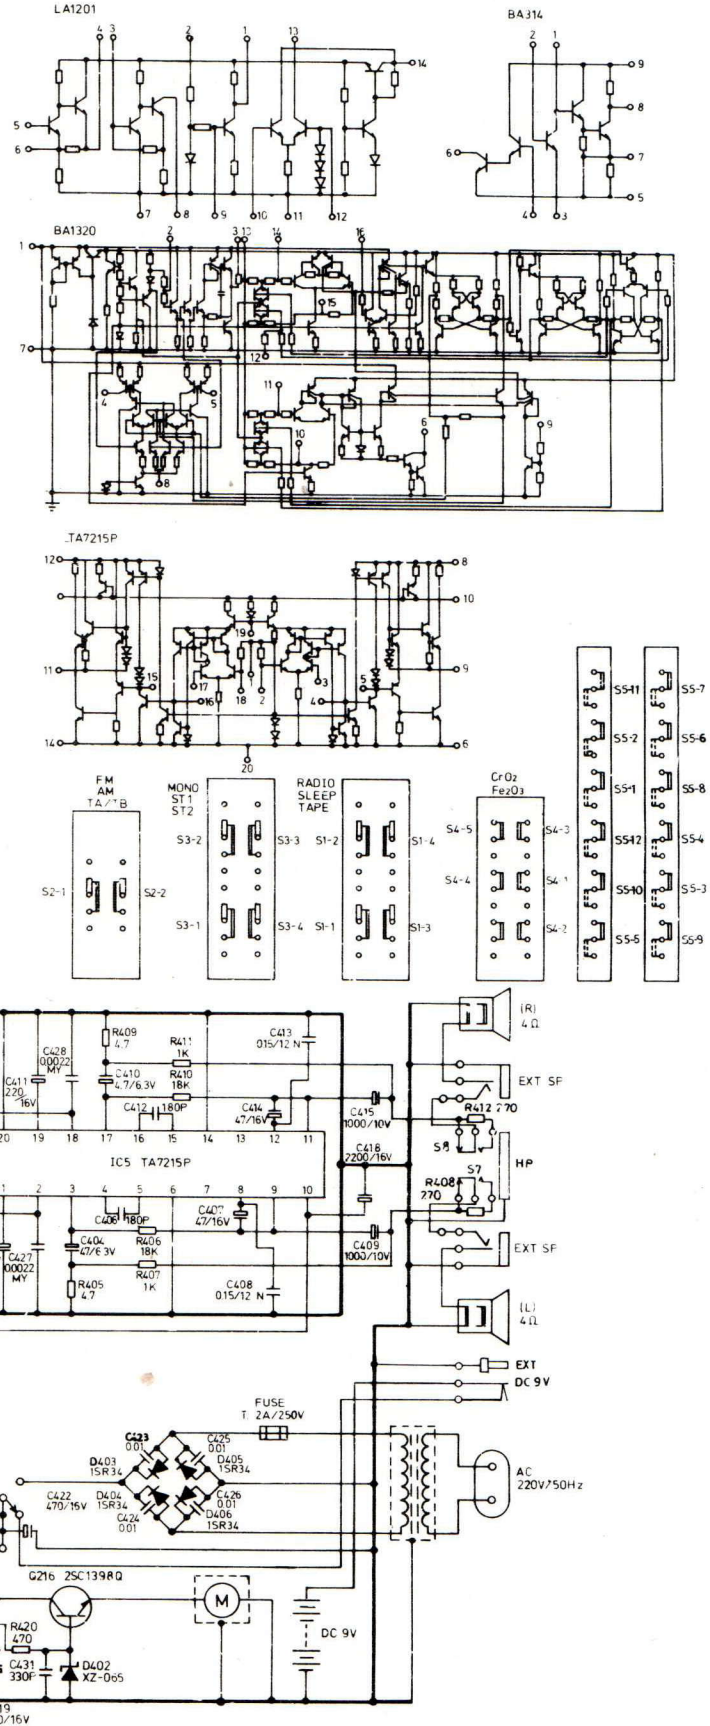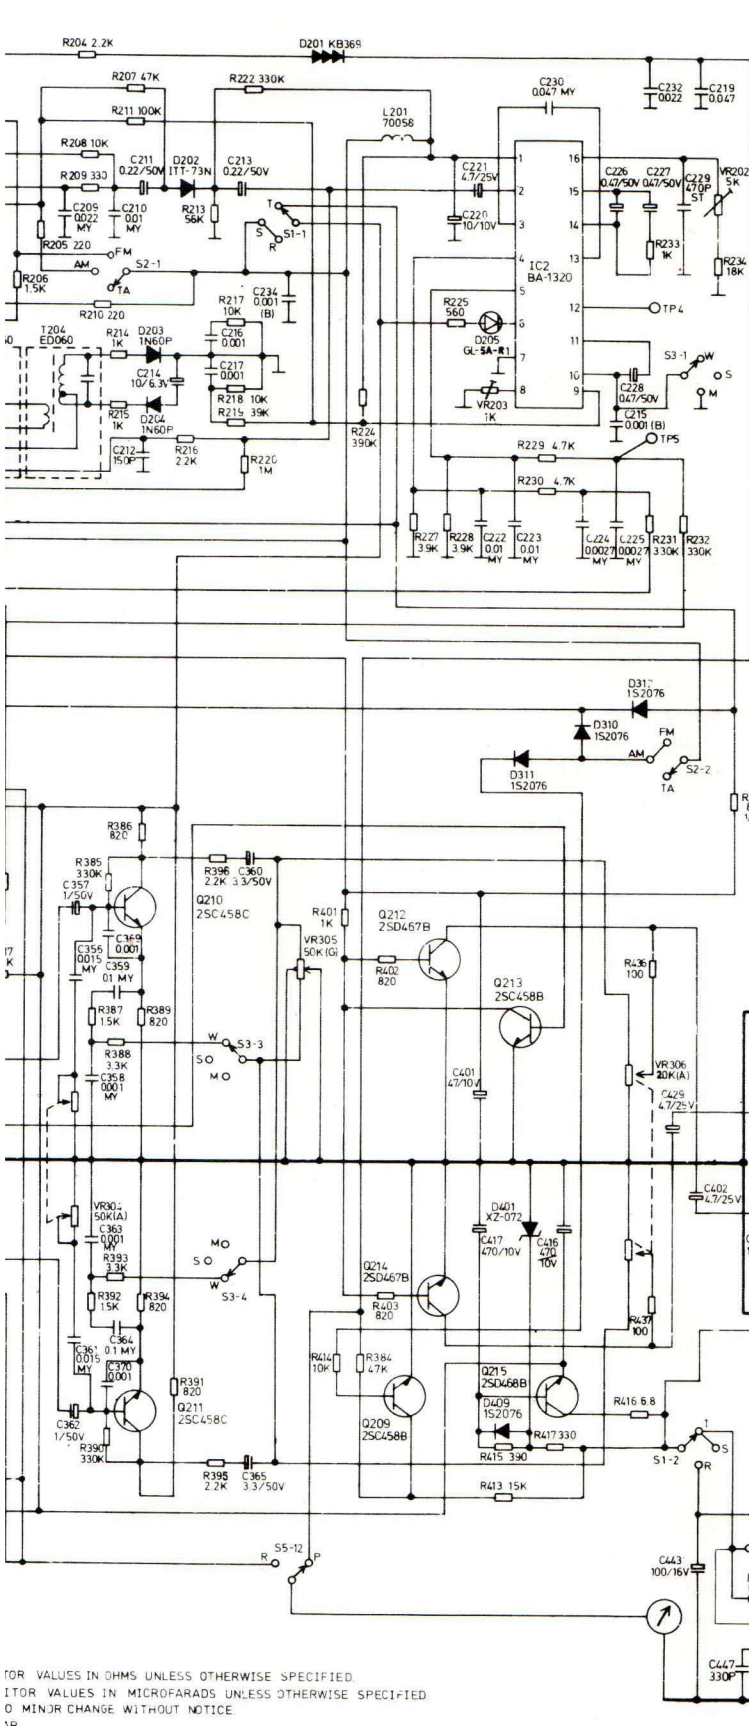

FOR VALUES IN OHMS UNLESS OTHERWISE SPECIFIED.
 μF FOR VALUES IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
 ○ MINOR CHANGE WITHOUT NOTICE.
 Δ R
 □ CON
 ▽ TAL
 ▲ POINT