

LUXOR

KOPPLINGSSCHEMA
CIRCUIT DIAGRAM
SCHALTSCHHEMA
KYTKINKAAVA

SKANTIC

15050821


Ser. 1
Sarja 1

15050822

Nov. 1978

FM-ANT. 300
75 ohm
GROUND

NOTES:
1. Unless otherwise specified ceramic capacitors used are of 0.04uF
2. ALL CAPACITORS IN MICRO FARADS(P-10¹²FARAD)
3. ALL RESISTORS IN OHMS(K-10³ M-10⁶) 1/4 W

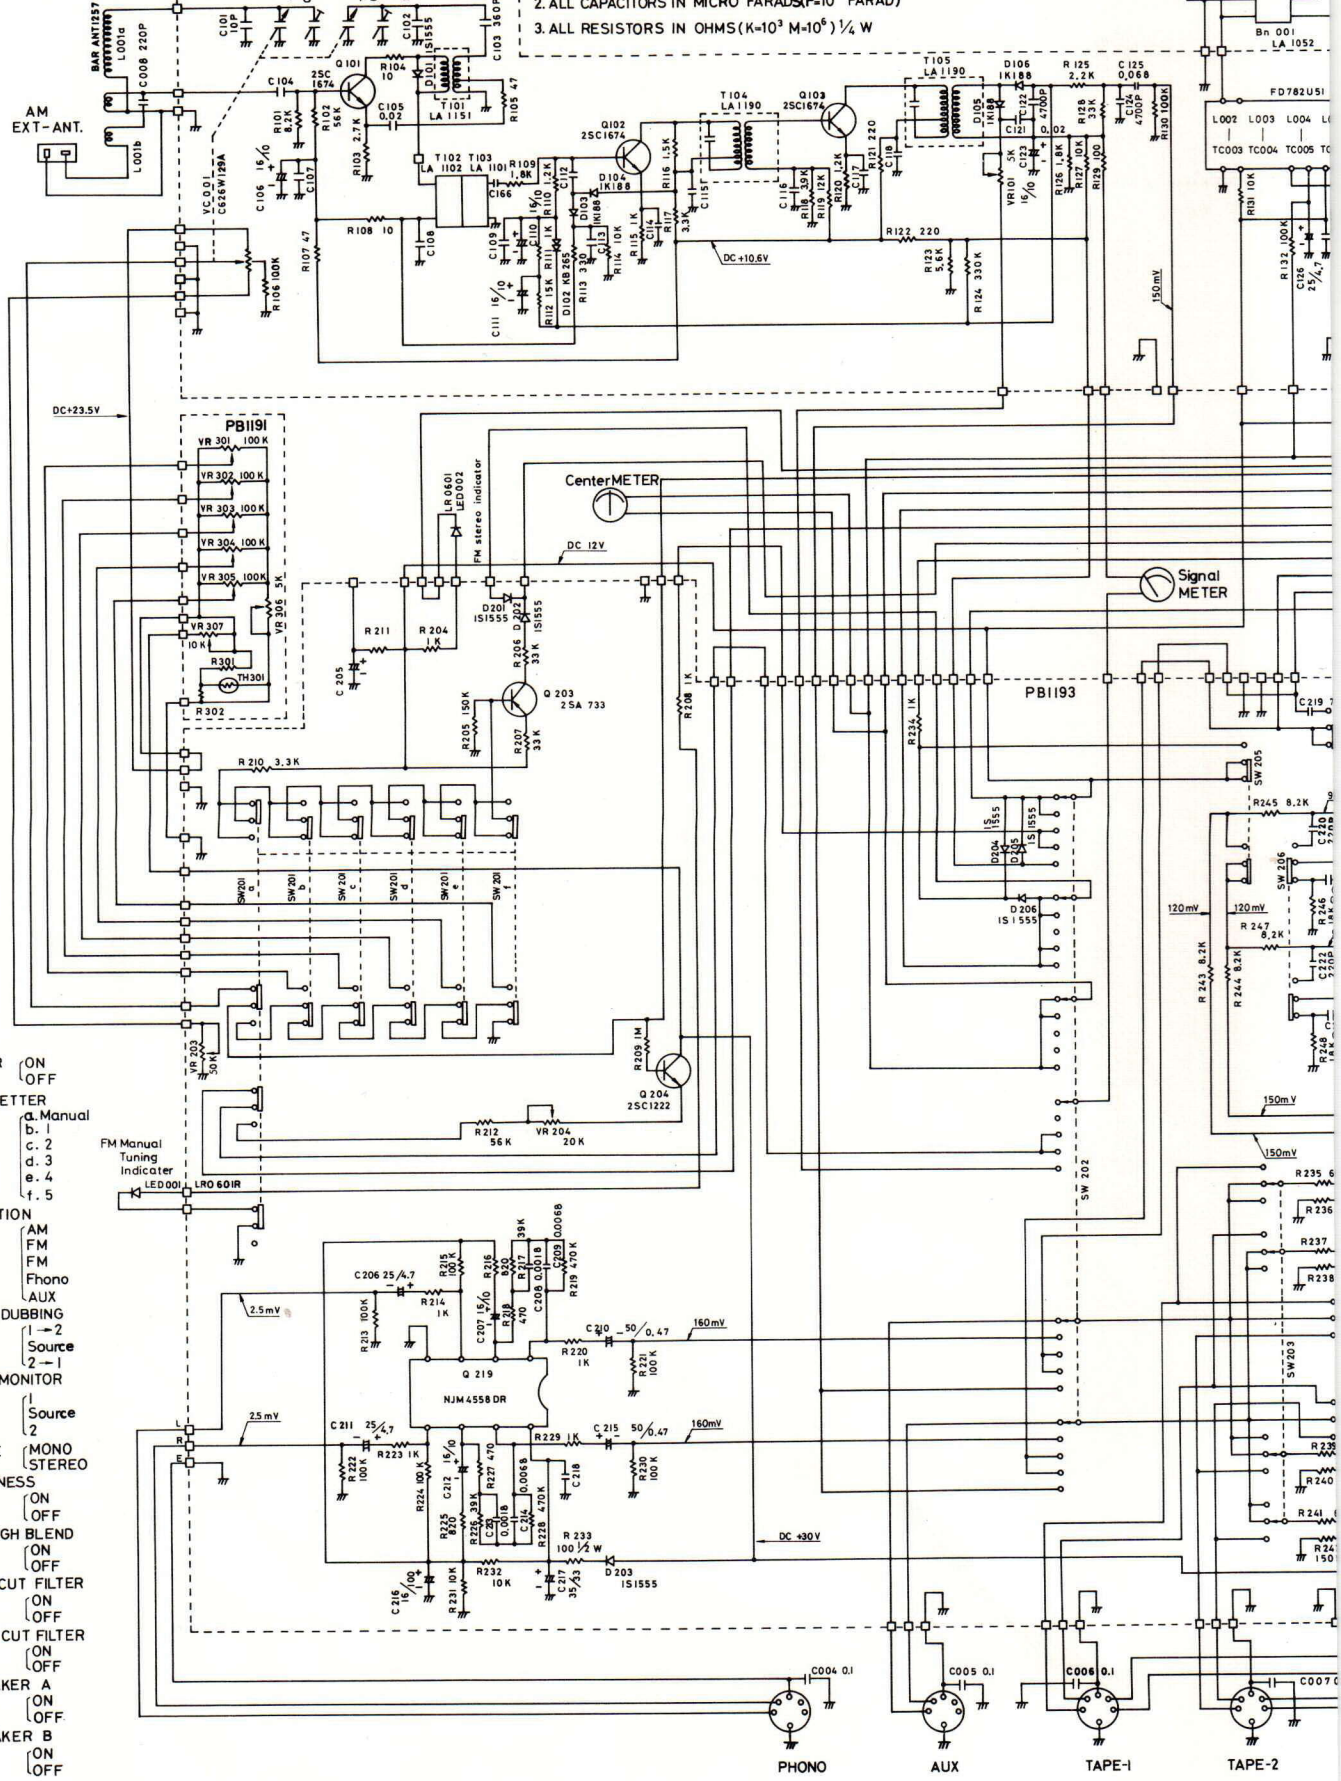

- SW001 POWER (ON/OFF)
- SW201 PRE SETTER
 - a. Manual
 - b. 1
 - c. 2
 - d. 3
 - e. 4
 - f. 5
- SW202 FUNCTION
 - AM
 - FM
 - FM
 - Phono
 - AUX
- SW203 TAPE DUBBING
 - 1 → 2
 - Source
 - 2 → 1
- SW204 TAPE MONITOR
 - 1
 - Source
 - 2
- SW205 MODE
 - MONO
 - STEREO
- SW206 LOUDNESS
 - ON
 - OFF
- SW207 FM HIGH BLEND
 - ON
 - OFF
- SW208 HIGH CUT FILTER
 - ON
 - OFF
- SW209 LOW CUT FILTER
 - ON
 - OFF
- SW401 SPEAKER A
 - ON
 - OFF
- SW402 SPEAKER B
 - ON
 - OFF

FM Manual Tuning Indicator LED001 LRO 601R

Center METER

Signal METER

PHONO

AUX

TAPE-1

TAPE-2

