


SERVICE MANUAL

SKANTIC

LUXOR

8111

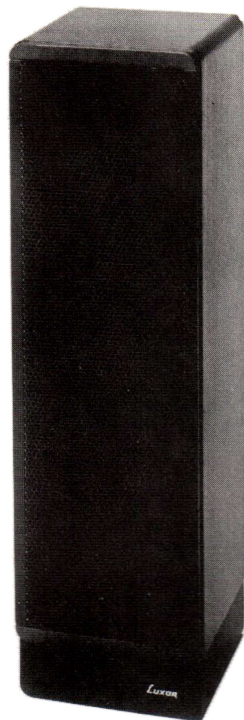

TYPE 1404011

Bestyckning Speaker units Bestückung	1 13 cm, 1 10 cm, 1 2,5 cm (dome tweeter)
Impedans Impedance Impedanz	4 ohm
Märkeffekt Power handling capacity Nennbelastbarkeit	40 W
Frekvensområde Frequency response Übertragungsbereich	50—20000 Hz
Delningsfrekvenser Crossover frequencies Übergangsfrequenzen	1500 Hz, 6000 Hz
Volym Volume Volumen	8 L
