

SERVICE MANUAL

SKANTIC

LUXOR

8011




TYPE 110 **9103**



— AC 220 V



— 500 mW/8 Ω



— 24 Hrs

— 2×9 V back up

FM

AM

Frekvensområde
Frequency Range

87—109 MHz

525—1650 kHz

Mellanfrekvens
Intermediate Frequency

10.7 MHz

460 kHz


Max. känslighet
Max. Sensitivity

6.3 μ V

250 μ V/m

Q4 2SC 930 D

Q5 2SC 930 D

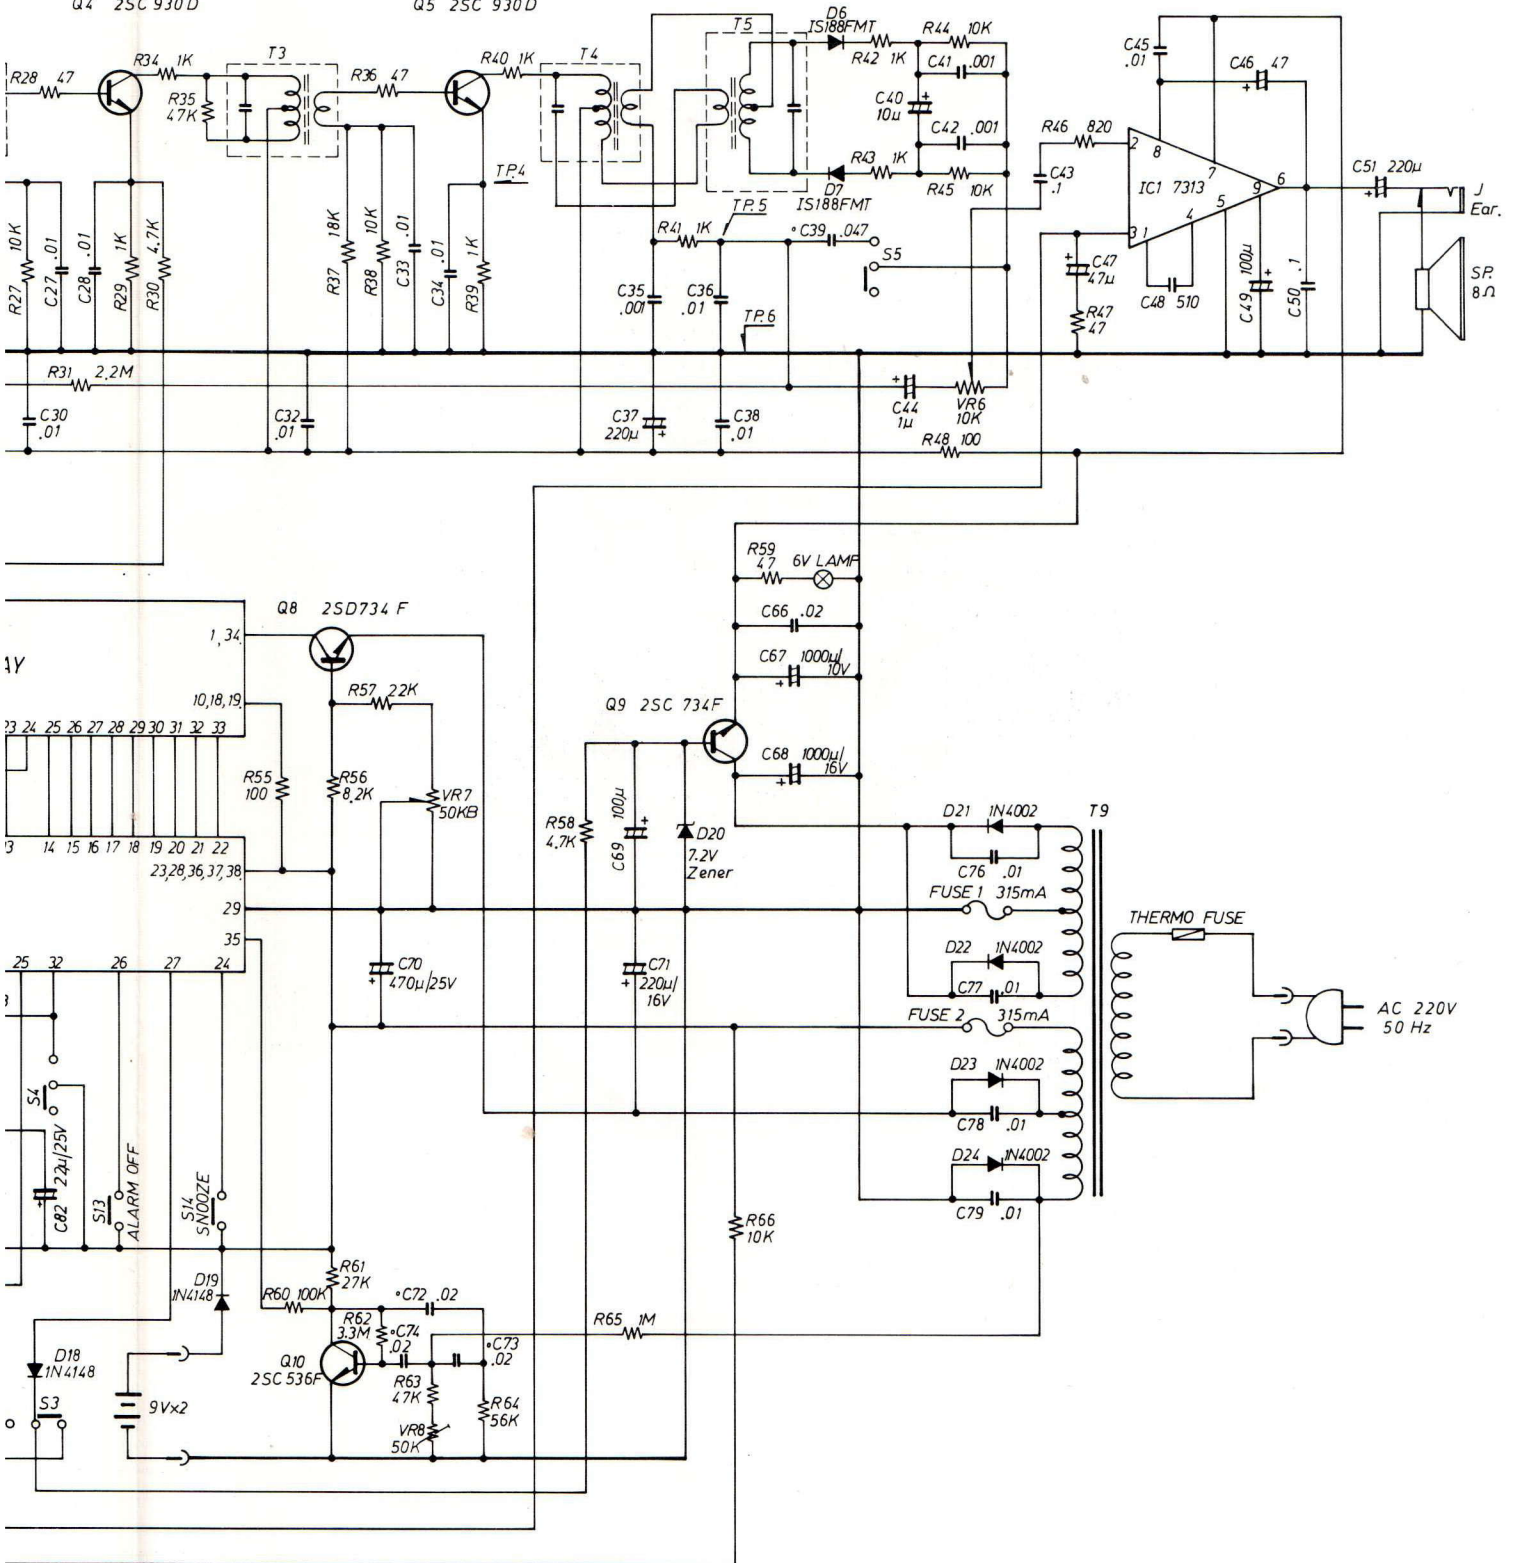

KOPPLINGSSCHEMA CIRCUIT DIAGRAM

