


SERVICE MANUAL

SKANTIC

LUXOR

8011

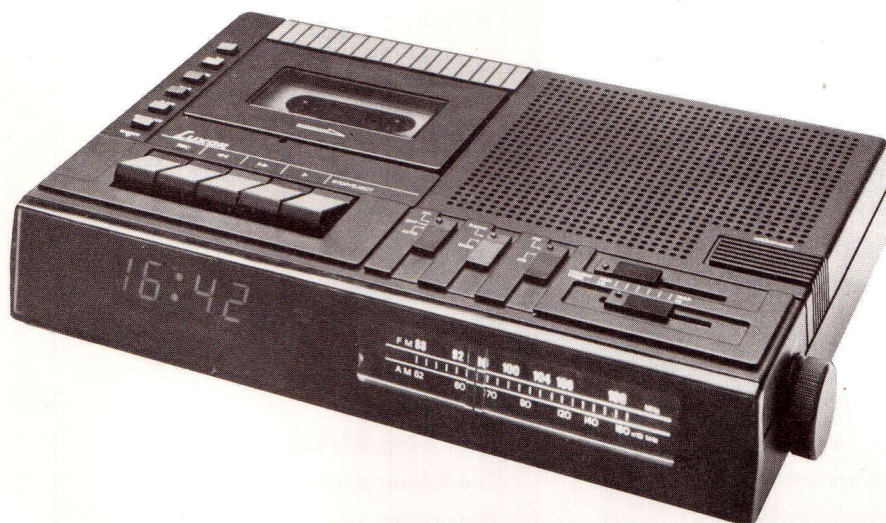


TYPE 110 **9109**



— AC 220 V



— 900 mW



— 24 Hrs
— 2×9 V back up

FM

AM

Frekvensområde
Frequency Range

87.25—109 MHz

515—1040 kHz

Mellanfrekvens
Intermediate Frequency

10.7 MHz

460 kHz


Max. känslighet
Max. Sensibility

8.9 μ V

316 μ V

Q.O — 100—6300 Hz

Wow & Flutter max. 0.4 %

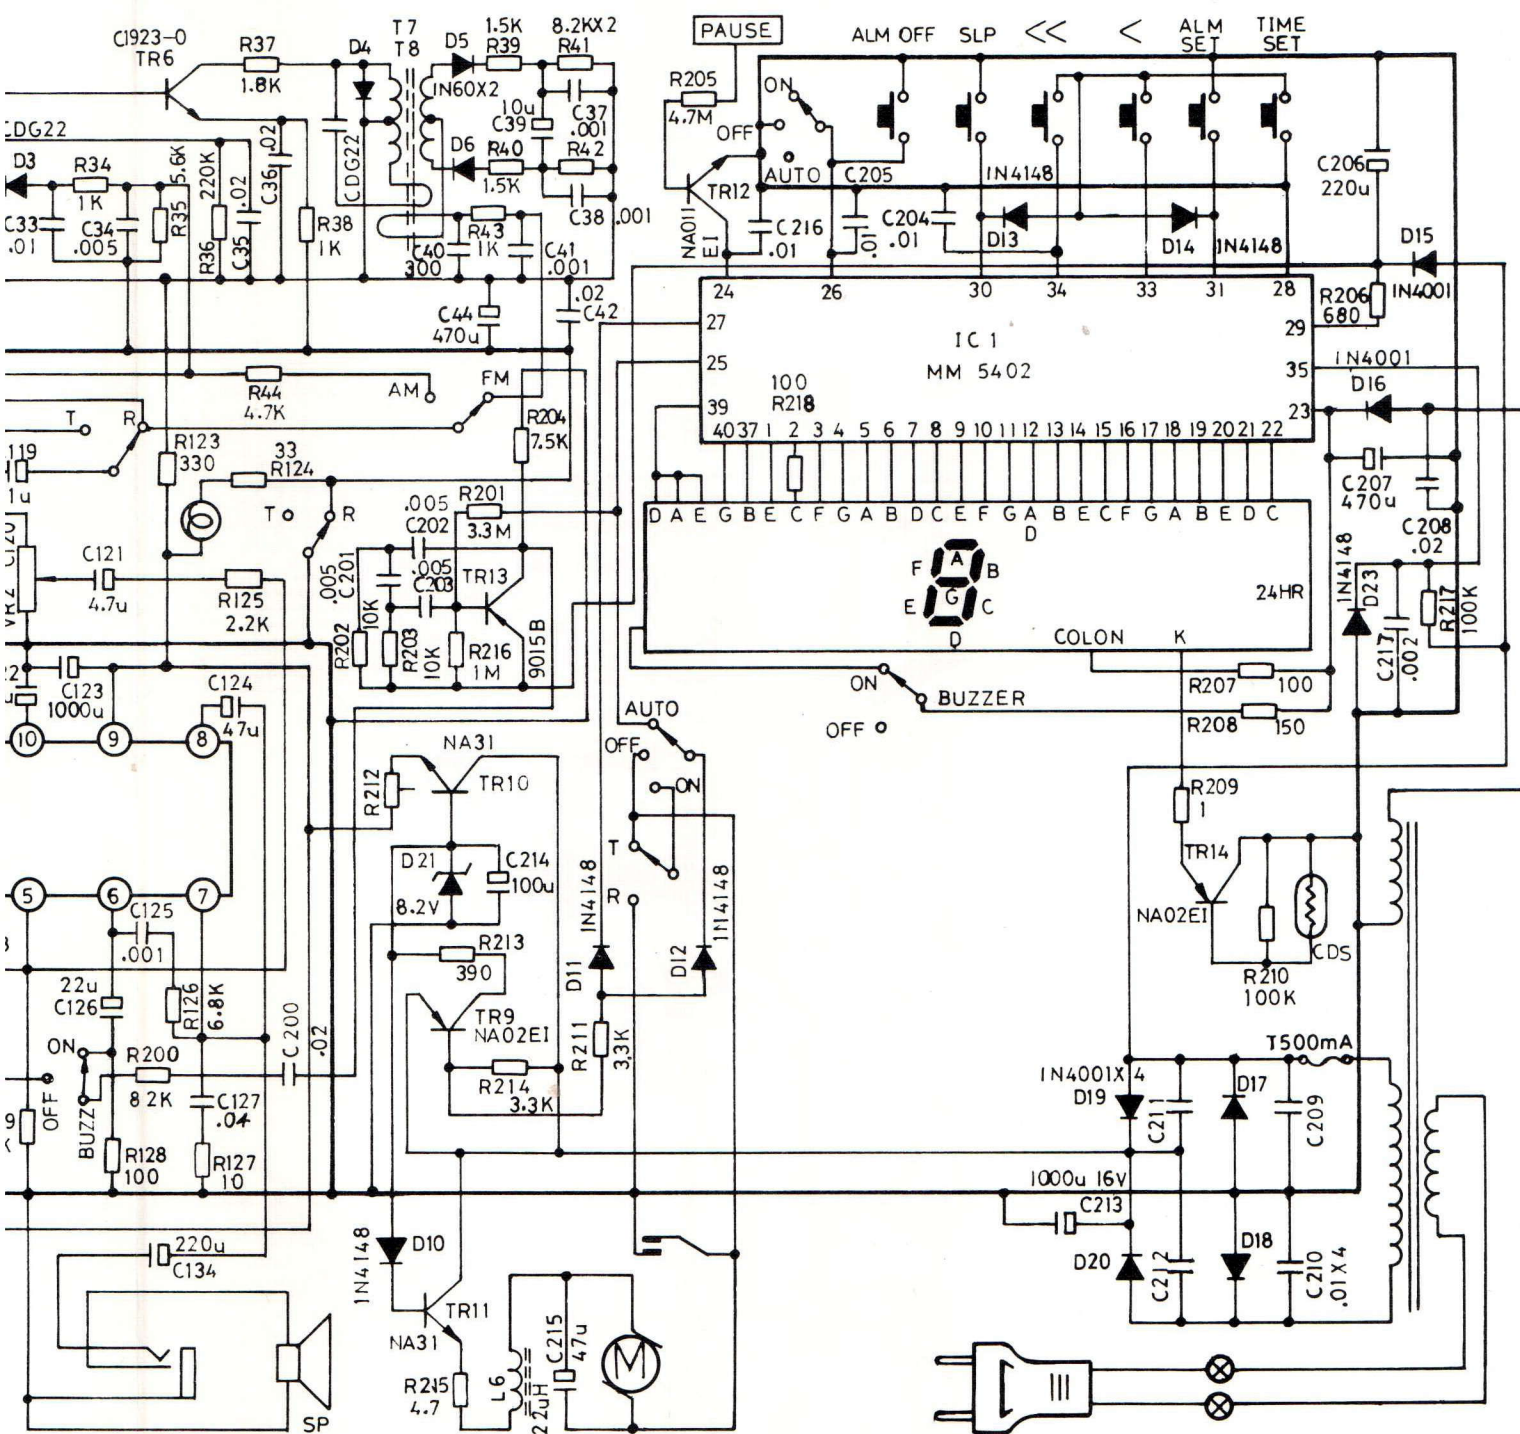

CIRCUIT DIAGRAM

